



Data sheet

blueplanet

3.0 TL1 | 3.5 TL1

3.7 TL1 | 4.0 TL1

4.6 TL1 | 5.0 TL1

Small system? Big convenience. Highest yields!

The transformerless string inverters blueplanet 3.0 to 5.0 TL1.

KACO new energy has just rolled out its new "blueplanet" inverter series with a line-up of 1-phase, transformerless units. Newly developed, and, constructed from scratch, the blueplanet TL1 fulfil each and every requirement expected of modern solar PV inverters for use in residential PV systems: they are light and can be installed quickly; all essential technical features are included in the price; reliable operation and yields are guaranteed.

The finely-differentiated output of the blueplanet TL1 ranges from 3.0 to 5.0 kVA, so that even operators of the smallest PV systems will find the right inverter. The gradation of the output power therefore takes into consideration all current output limits stipulated in European network access provisions.

A wide voltage range starts at as little as 125 V and goes up to 550 V which allows for a multitude of string designs. Having 2 MPP trackers, which can each process the whole AC power, system layout is now a breeze (blueplanet 3.0 TL1

also available with 1 MPPT). Angled roofs or sub-arrays with different orientations? That is no problem for the flexible blueplanet TL1 inverters.

With their low weight, they are almost fun to mount. Using plug-in connectors on the DC and on the AC side, they are just as quickly connected as they are mounted. The inverters incorporate a small, maintenance-free, interior cooler (the blueplanet 3.0 TL1 is fanless!) which achieves uniform cooling without taking in ambient air. That means that the blueplanet TL1 is left completely free to achieve maximum output.

The standard incorporation of RS485, Ethernet and USB ensures elegant communication and convenient monitoring – even more interfaces are optionally available. In order to assure perfect link-up, the inverters have the same integrated data logger and web server as their 3-phase siblings. For commissioning and checking on the current operating data, they also feature the same easy-to-use,

clearly laid out, graphical display. An additional interface module with 4 digital inputs allows performance targets sent by the grid operator via ripple control receiver to be put into action by the inverters themselves; this does away with an intermediate data logger.

If you want to use your self-generated solar power in your own home, the blueplanet TL1 also come with our Privatt function for managing self-use.

Your declaration of solar independence becomes complete when you use an intelligent energy storage system; it allows you to use your own clean energy whenever you want to. Fitted with a blueplanet TL1, your private solar power plant can be upgraded with a storage system at any time. And, our blueplanet gridsave eco 5.0 TR1 battery inverter will take care of the energy management of your PV storage system too. Anything less would be a thing of the past!

Technical data

blueplanet 3.0 TL1 | 3.5 TL1 | 3.7 TL1 | 4.0 TL1 | 4.6 TL1 | 5.0 TL1

| Electrical data | 3.0 TL1 M1 | 3.0 TL1 | 3.5 TL1 |
|----------------------------------|--|--|--|
| DC input | | | |
| MPP range@Phom | 280 V ... 510 V | 140 V ... 510 V | 165 V ... 510 V |
| Operating range | 125 V - 550 V | 125 V - 550 V | 125 V - 550 V |
| Min. DC voltage/starting voltage | 125 V/150 V | 125 V/150 V | 125 V/150 V |
| No-load voltage | 600 V ¹⁾ | 600 V ¹⁾ | 600 V ¹⁾ |
| Max. input current | 1x11,0 A | 2x11,0 A | 2 x11.0 A |
| Number of MPP trackers | 1 | 2 | 2 |
| Max. power/tracker | 3.1 kW | 3.1 kW | 3.6 kW |
| Number of strings | 2 | 2 | 2 |
| AC output | | | |
| Rated output | 3 000 VA | 3 000 VA | 3 450 VA |
| Supply voltage | 230 V (1/N/PE) | 230 V (1/N/PE) | 230 V (1/N/PE) |
| Rated current | 13.0 A | 13.0 A | 15.0 A |
| Rated frequency | 50 Hz / 60 Hz | 50 Hz / 60 Hz | 50 Hz / 60 Hz |
| cos phi | 0.30 inductive ... 0.30 capacitive | 0.30 inductive ... 0.30 capacitive | 0.30 inductive ... 0.30 capacitive |
| Number of grid phases | 1 | 1 | 1 |
| General electrical data | | | |
| Max. efficiency | 97.2 % | 97.2 % | 97.2 % |
| Europ. efficiency | 96.5 % | 96.5 % | 96.4 % |
| Night consumption | 3 W | 3 W | 3 W |
| Circuitry topology | transformerless | transformerless | transformerless |
| Mechanical data | | | |
| Display | graphical display + LEDs | graphical display + LEDs | graphical display + LEDs |
| Control units | 4-way navigation + 2 buttons | 4-way navigation + 2 buttons | 4-way navigation + 2 buttons |
| Interfaces | standard: 2xEthernet, USB, RS485, optional: S0, 4-DI, 4-DO | standard: 2xEthernet, USB, RS485, optional: S0, 4-DI, 4-DO | standard: 2xEthernet, USB, RS485, optional: S0, 4-DI, 4-DO |
| Fault signalling relay | potential-free NOC max. 230 V/1 A | potential-free NOC max. 230 V/1 A | potential-free NOC max. 230 V/1 A |
| Connections | DC: SUNCLIX AC: connection plug | DC: SUNCLIX AC: connection plug | DC: SUNCLIX AC: connection plug |
| Ambient temperature | -25 °C ... +60 °C ²⁾ | -25 °C ... +60 °C ²⁾ | -25 °C ... +60 °C ²⁾ |
| Cooling | natural convection | natural convection | natural convection |
| Protection class | IP54 | IP54 | IP54 |
| Noise emission | < 35 dB(A) | < 35 dB(A) | < 35 dB (A) |
| DC switch | integrated | integrated | integrated |
| Casing | innovative ASA/PC casting | innovative ASA/PC casting | innovative ASA/PC casting |
| H x W x D | 560 x 367 x 227 mm | 560 x 367 x 227 mm | 560 x 367 x 227 mm |
| Weight | 15 kg | 16.5 kg | 18 kg |
| Certifications | | | |
| Safety | EN 61000-6-1/-2/-3, IEC 62109-1/ -2 | | |
| Grid compliance | VDE-AR-N 4105, VDE0126-1-1, ÖVE/ÖNORM E 8001, UTE C 15-712-1, G83-2, G59/3, CEI-021, EN 50438, C10/11, ... for more see homepage/download area | | |

Conforms to the country-specific standards and regulations according to the country version that has been set.
¹⁾ Feed in starts at less than 550 V. ²⁾ Power derating at high ambient temperatures.

| 3.7 TL1 | 4.0 TL1 | 4.6 TL1 | 5.0 TL1 |
|--|---|---|---|
| DC input | | | |
| 170 V ... 510 V | 185 V ... 510 V | 215 V ... 510 V | 235 V ... 510 V |
| 125 V - 550 V | 125 V - 550 V | 125 V - 550 V | 125 V - 550 V |
| 125 V / 150 V | 125 V / 150 V | 125 V / 150 V | 125 V / 150 V |
| 600 V ¹⁾ | 600 V ¹⁾ | 600 V ¹⁾ | 600 V ¹⁾ |
| 2x11.0 A | 2x11.0 A | 2x11.0 A | 2x11.0 A |
| 2 | 2 | 2 | 2 |
| 3.8 kW | 4.1 kW | 4.7 kW | 5.1 kW |
| 2 | 2 | 2 | 2 |
| AC output | | | |
| 3 680 VA | 4 000 VA | 4 600 VA | 5 000 VA |
| 230 V (1/N/PE) | 230 V (1/N/PE) | 230 V (1/N/PE) | 230 V (1/N/PE) |
| 16.0 A | 17.5 A | 20.0 A | 21.7 A |
| 50 Hz / 60 Hz | 50 Hz / 60 Hz | 50 Hz / 60 Hz | 50 Hz / 60 Hz |
| 0.30 inductive ... 0.30 capacitive | 0.30 inductive ... 0.30 capacitive | 0.30 inductive ... 0.30 capacitive | 0.30 inductive ... 0.30 capacitive |
| 1 | 1 | 1 | 1 |
| General electrical data | | | |
| 97.2 % | 97.2 % | 97.2 % | 97.2 % |
| 96.5 % | 96.6 % | 96.7 % | 96.6 % |
| 3 W | 3 W | 3 W | 3 W |
| transformerless | transformerless | transformerless | transformerless |
| Mechanical data | | | |
| graphical display + LEDs | graphical display + LEDs | graphical display + LEDs | graphical display + LEDs |
| 4-way navigation + 2 buttons | 4-way navigation + 2 buttons | 4-way navigation + 2 buttons | 4-way navigation + 2 buttons |
| standard: 2xEthernet, USB, RS485 optional: S0, 4-DI, 4-DO | standard: 2xEthernet, USB, RS485 optional: S0, 4-DI, 4-DO | standard: 2xEthernet, USB, RS485 optional: S0, 4-DI, 4-DO | standard: 2xEthernet, USB, RS485 optional: S0, 4-DI, 4-DO |
| potential-free NOC max. 230 V/1 A | potential-free NOC max. 230 V/1 A | potential-free NOC max. 230 V/1 A | potential-free NOC max. 230 V/1 A |
| DC: SUNCLIX AC: connection plug | DC: SUNCLIX AC: connection plug | DC: SUNCLIX AC: connection plug | DC: SUNCLIX AC: connection plug |
| -25 °C ... +60 °C ²⁾ | -25 °C ... +60 °C ²⁾ | -25 °C ... +60 °C ²⁾ | -25 °C ... +60 °C ²⁾ |
| maintenance-free interior fan | maintenance-free interior fan | maintenance-free interior fan | maintenance-free interior fan |
| IP54 | IP54 | IP54 | IP54 |
| < 35 dB(A) | < 35 dB(A) | < 35 dB(A) | < 35 dB(A) |
| integrated | integrated | integrated | integrated |
| innovative ASA/PC casting | innovative ASA/PC casting | innovative ASA / PC casting | innovative ASA / PC casting |
| 560 x 367 x 227 mm | 560 x 367 x 227 mm | 560 x 367 x 227 mm | 560 x 367 x 227 mm |
| 18 kg | 18 kg | 18 kg | 18 kg |
| Certifications | | | |
| EN 61000-6-1/-2/-3, IEC 62109-1/ -2 | | | |
| VDE-AR-N 4105, VDE0126-1-1, ÖVE/ÖNORM E 8001, UTE C 15-712-1, G83-2, G59/3, CEI-021, EN 50438, C10/11, ... for more see homepage/download area | | | pending |

Conforms to the country-specific standards and regulations according to the country version that has been set.
¹⁾ Feed in starts at less than 550 V. ²⁾ Power derating at high ambient temperatures.



blueplanet
 3.0 TL1 | 3.5 TL1 | 3.7 TL1
 4.0 TL1 | 4.6 TL1 | 5.0 TL1

2 MPP trackers, wide MPP range

Lightweight, straightforward mounting

Convenient AC and DC cabling thanks to plug-in connectors


Integrated data logger with web server

Graphical display, intuitive menu navigation


Priwatt function for the self-use of solar power (optional)

Graphical Display of efficiency

3D efficiency diagram for blueplanet 4.6 TL1

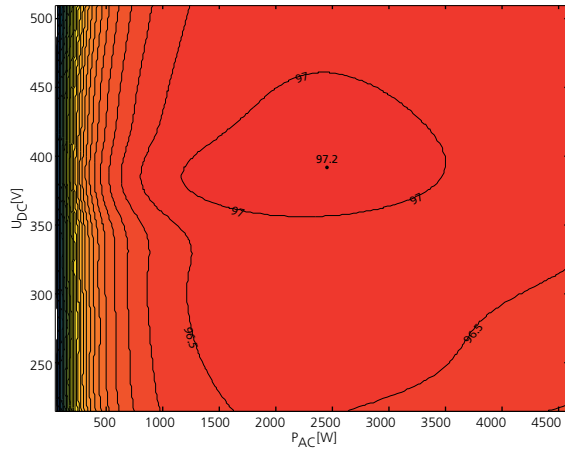

Efficiency characteristic curve for blueplanet 4.6 TL1

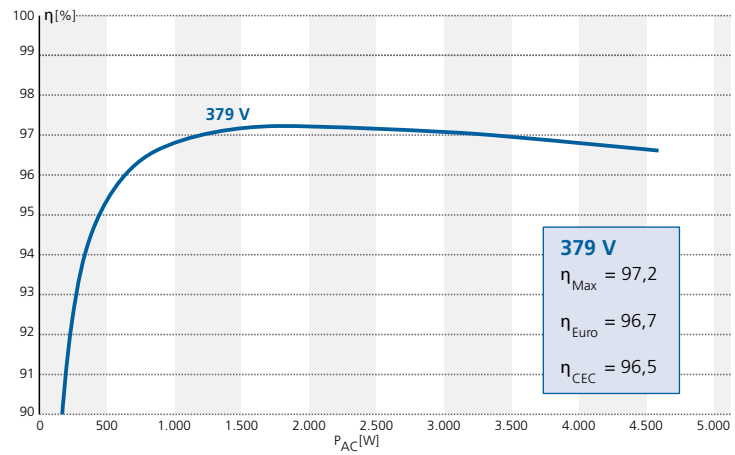

Your retailer

DarsunSolar
www.darsunsolar.pl
 tel. +48 697 161 842
 e-mail: info@darsunsolar.pl